

D-ATIS
135.580


Apt Elev
1411

- Alt Set: hPa Trans level: By ATC
1. P-RNAV or RNAV 1 required.
 2. GNSS required.
 3. No turn onto base unless cleared by ATC.
 4. EXPECT RADAR vectors to final approach.

BELUS 3R [BELU3R]
RWY 22 RNAV ARRIVAL

4

SPEED: MAX 250 KT BELOW FL100 OR AS BY ATC

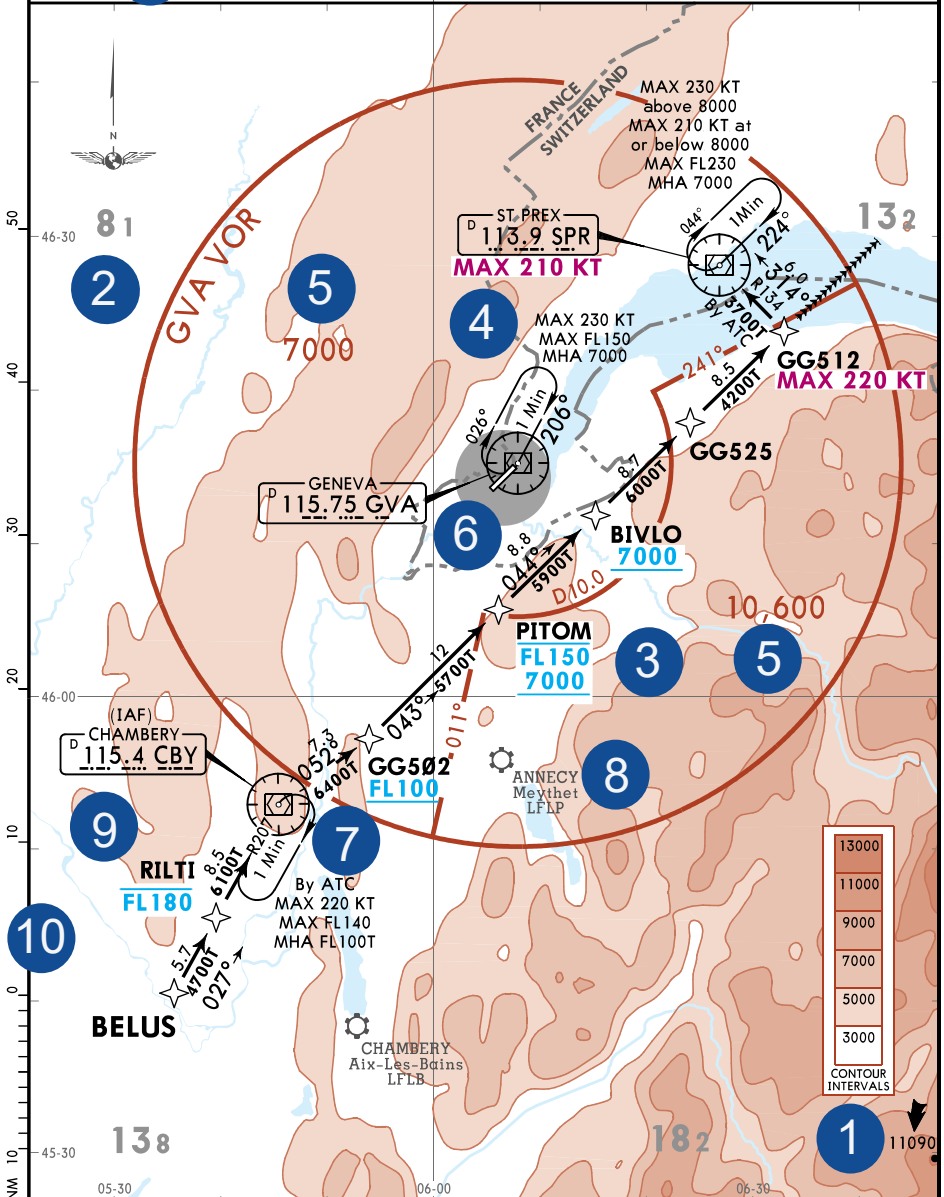

ROUTING

Via RILTI to CBY, then to GG502, then to PITOM, then to BIVLO, then to GG525, then to GG512, continue on track. By ATC to SPR to intercept final approach.